


SCREW SUPPORT MOUNTS Series DLC



Series DLC

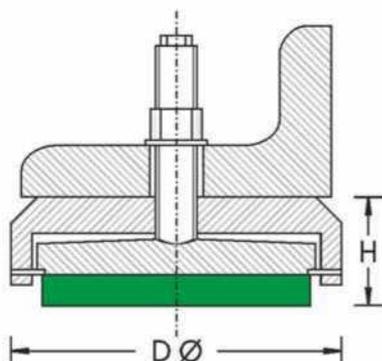


Dynemech DLC Series Mounts are simple and effective vibration dampers for machines with respective holes in the base. These mounts offer both low frequency attenuation and stable machine levelling.

Model	Load (Kg/pc)	Model	Load (Kg/pc)	Model	Load (Kg/pc)	Model	Load (Kg/pc)	Model	Load (Kg/pc)	Bolt Size	Dia D (mm)	H u/m/p1	H s2/i	Adj. (mm)
DLC1-u	150	DLC1-m	190	DLC1-p1	75	DLC1-s2	125	DLC1-i	250	M 12x100	65	30	40	6
DLC2-u	350	DLC2-m	450	DLC2-p1	175	DLC2-s2	300	DLC2-i	575	M 12x100	98	37	47	8
DLC3-u	600	DLC3-m	800	DLC3-p1	300	DLC3-s2	550	DLC3-i	1000	M 16x100	125	44	54	8
DLC4-u	900	DLC4-m	1150	DLC4-p1	500	DLC4-s2	850	DLC4-i	1600	M 16x100	150	46	56	10
DLC5-u	1400	DLC5-m	1750	DLC5-p1	700	DLC5-s2	1250	DLC5-i	2300	M 18x150	180	48	58	10
DLC6-u	1900	DLC6-m	2400	DLC6-p1	950	DLC6-s2	1700	DLC6-i	3100	M 20x150	204	52	62	12
DLC7-u	2500	DLC7-m	3200	DLC7-p1	1250	DLC7-s2	2200	DLC7-i	4000	M 20x150	235	57	67	12
DLC8-u	3500	DLC8-m	4000	DLC8-p1	1500	DLC8-s2	2800	DLC8-i	5200	M 24x200	270	72	82	18
DLC9-u	4200	DLC9-m	5000	DLC9-p1	1900	DLC9-s2	3500	DLC9-i	6500	M 24x200	302	84	94	18

SCREW SUPPORT MOUNTS Series DL/DLS



Series DL

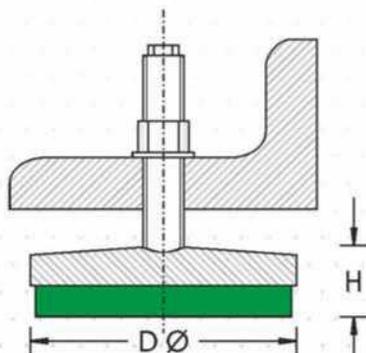

Dynemech DL Series Mounts is used for light to medium weight machines suited to levelling screw support or having tapped hole in the base.

Dynemech DLS Series Mounts, developed in stainless steel finds application in pharmaceutical, food and beverages processing and packaging units, medical equipment manufacturing and chemical processing industries. Provide vibration isolation with complete hygienic seal and corrosion resistance.

Model	Load (Kg/pc)	Model	Load (Kg/pc)	Model	Load (Kg/pc)	Model	Load (Kg/pc)	Model	Load (Kg/pc)	Dia D (mm)	H u/m/p1	H s1	H s2
DL1-u	150	DL1-m	190	DL1-p1	75	DL1-s1	80	DL1-s2	125	55	21	26	31
DL2-u	350	DL2-m	450	DL2-p1	175	DL2-s1	200	DL2-s2	300	85	28	33	38
DL3-u	600	DL3-m	800	DL3-p1	300	DL3-s1	375	DL3-s2	550	112	28	33	38
DL4-u	900	DL4-m	1150	DL4-p1	500	DL4-s1	575	DL4-s2	850	135	30	35	40
DL5-u	1400	DL5-m	1750	DL5-p1	700	DL5-s1	800	DL5-s2	1250	160	30	35	40
DL6-u	1900	DL6-m	2400	DL6-p1	950	DL6-s1	1100	DL6-s2	1700	185	34	39	44
DL7-u	2500	DL7-m	3200	DL7-p1	1250	DL7-s1	1500	DL7-s2	2200	215	35	40	45
DL8-u	3500	DL8-m	4000	DL8-p1	1500	DL8-s1	1900	DL8-s2	2800	249	44	49	54
DL9-u	4200	DL9-m	5000	DL9-p1	1900	DL9-s1	2400	DL9-s2	3500	276	43	48	53